

Lasertainment
PRODUCTIONS INCORPORATED



Stinger



SERIES

RGB DPSS
YAG DPSS
GOLD DPSS



GOLD 1 TO 5 WATTS

DIODE-PUMPED SOLID-STATE

STINGER IS A REGISTERED TRADEMARK
© 2010 LASERTAINMENT PRODUCTIONS


WWW.LASERTAINMENT.COM



THIS SINGLE COLOR (GOLD ONLY) DIODE-PUMPED SOLID-STATE HIGH POWERED LASER SYSTEM (AVAILABLE FROM 1 WATT TO 5 WATTS) IS GREAT FOR ANY APPLICATION. IT PRODUCES AERIAL LASER BEAM EFFECTS AND HIGH QUALITY LASER GRAPHICS, INDOORS OR OUTDOORS, AND COMES EQUIPPED WITH PREPROGRAMMED EFFECTS THAT CAN BE CONTROLLED VIA DMX512 USING YOUR OWN LIGHTING CONSOLE. THE SYSTEM ALSO HAS THE STANDARD ILDA CONNECTOR FOR USE OF ANY LASER SOFTWARE. LASERTAINMENT HAS BEEN A DEALER FOR PANGOLIN LASER SOFTWARE FOR ALMOST 20 YEARS. THE BEST LASER SOFTWARE ON THE MARKET ALLOWING YOU TO CREATE YOUR OWN LASER GRAPHICS AND SHOWS THAT CAN BE CHOREOGRAPHED TO MUSIC.



**GREAT FOR:
NIGHT CLUBS
AMUSEMENT PARKS
DJS
CONCERTS
EXHIBITS
LASER BILLBOARDS
AND MORE**

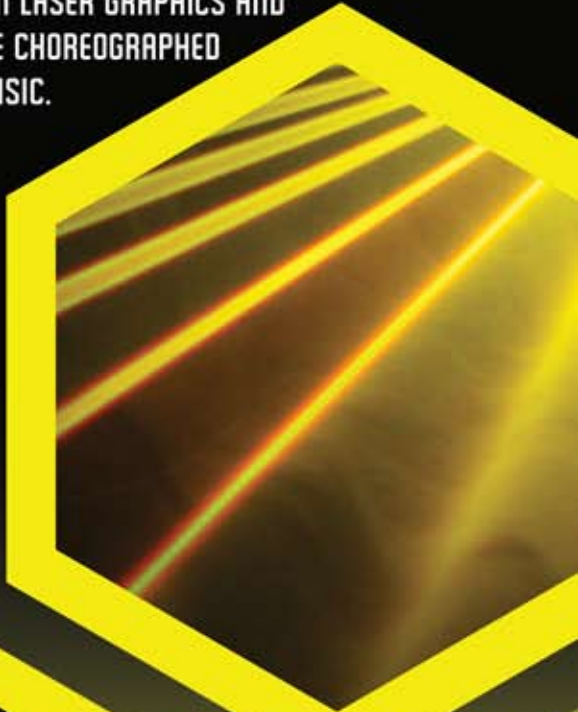

Hallmark

THIS SOLID STATE LASER SYSTEM IS 2 TIMES BRIGHTER THAN ION GAS LASERS (WATT-FOR-WATT) AS THERE ARE NO WASTED WAVE LENGTHS OR AOM COLOR MIXING LOSSES. THERE IS NO SPECIAL POWER OR COOLING REQUIREMENTS, IT'S JUST PLUG AND PLAY.



ALL OF OUR STINGER LASER SYSTEMS USE THE BEST OPTICAL X-Y SCANNERS. THE CAMBRIDGE 6215H GALVANOMETERS ARE THE FASTEST AND MOST ACCURATE ON THE MARKET TODAY. FOR HIGH RESOLUTION LASER GRAPHICS UP TO 60,000 PPS OR WIDE ANGLES UP TO A ONE TO ONE RATIO.



THE MICROMAX® DUAL AXIS SERVO DRIVER BOARDS ARE EASY TO TUNE AND STAY TUNED.



HIGH DUALITY OPTICS AND MOUNTS ARE USED TO KEEP LASERS ALIGNED EVEN FOR LONG TOURS WHERE DAILY SET UPS GO FOR MONTHS OR EVEN YEARS WITH LITTLE OR NO ADJUSTMENTS NECESSARY.




DMX512 FLASH CARDS ALLOW YOU TO UPLOAD, VIA USB, THOUSANDS OF LASER FRAMES AND ANIMATIONS THAT CAN BE STORED IN THE LASER PROJECTOR.

COLOR: GOLD
POWER OUTPUT: 1 TO 5 WATTS
DMX512 CONTROLLED
ILDA CONNECTOR
30K, 60K X, Y SCANNERS WITH DRIVER CARDS
INPUT POWER: AC 110-240V 50/60HZ
POWER CONSUMPTION: MAX. 10 AMPS
DIMENSIONS: 8" X 16" X 24"
WEIGHT: 45 LBS.
SOFTWARE: PANGOLIN



AVAILABLE WAVE LENGTHS:
YELLOW 589nm

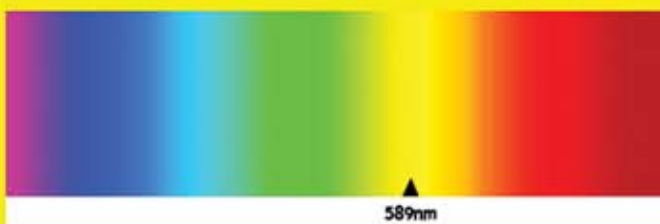

LASER DIODE-PUMPED SOLID-STATE
OUTPUT POWER (mW) >800 UP TO 2,500
TRANSVERSE MODE NEAR TEM00
OPERATING MODE CW
WARM-UP TIME (MINUTES) <15
M2 FACTOR 3.0-6.0
BEAM DIVERGENCE, FULL ANGLE (mRAD) <2.0
BEAM DIAMETER AT THE APERTURE (mm) ~4.0
BEAM HEIGHT FROM BASE PLATE (mm) 93.5
POLARIZATION RATIO >100:1
NOISE OF AMPLITUDE (RMS, 1-20MHZ) <1%
POINTING STABILITY AFTER WARM-UP (mRAD) <0.05
OPERATING TEMPERATURE (°C) 10-35
POWER SUPPLY (90-264VAC) PSU-W-FDA
EXPECTED LIFETIME (HOURS) 10,000
WARRANTY PERIOD 1 YEAR



Lasertainment
PRODUCTIONS INCORPORATED
WWW.LASERTAINMENT.COM

1.763.785.2737